

*With building space becoming even more expensive, the trend for taller buildings with smaller footprints is increasing. This presents loading challenges where our patented platforms can help*

# XENA systems UNDERSLUNG

## Features

- Less than 30 minutes to install
- Loading surface flush with floor
- Available in widths from 2.8 to 4.5 m
- Up to 5 Tonnes capability
- Ideal for loading pods, machinery and glass panels



## Service

- Delivery and install within days by experienced crews
- Full engineering design service for loading
- In house manufactured bespoke steelwork within days !





**“We used the underslung platform for loading Bathroom Pods, something we could not have done without the Xena Platform. The whole concept of the platform is simple but effective and in using the platform we have saved program time and manpower.”**

Kieran Conarty Site Manager

On the XenaDeck underslung platform the actual deck is below the platform frame which provides a level loading access at the slab edge. These platforms are typically used in situations where retractability is not required.

These platforms can be used with the optional safety cage that increases the height of the sides to prevent falls if staff stand on loaded materials.

Xena Systems Ltd, Forty Foot Road, Middlesbrough, Cleveland, TS2 1HG  
Tel :44 (0)1642 240078 Fax 44 (0)1642 249506 National 0871 200 2090  
Email : [info@xenasystems.com](mailto:info@xenasystems.com) [www.xenasystems.com](http://www.xenasystems.com)

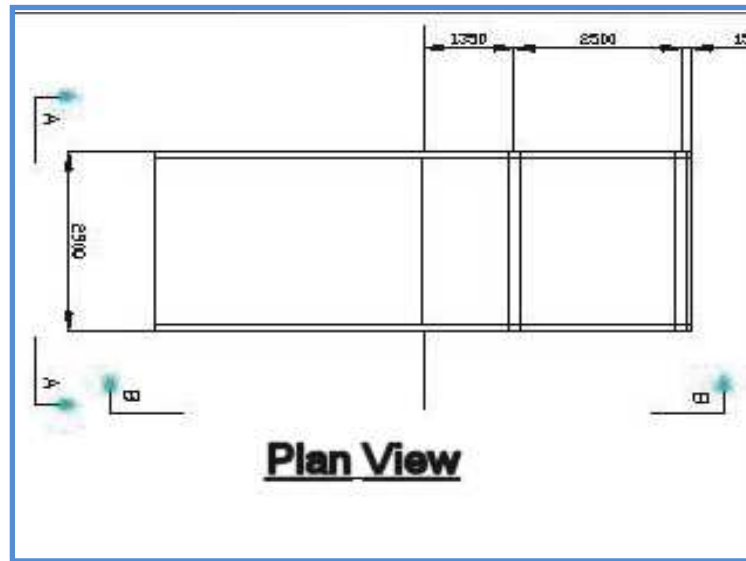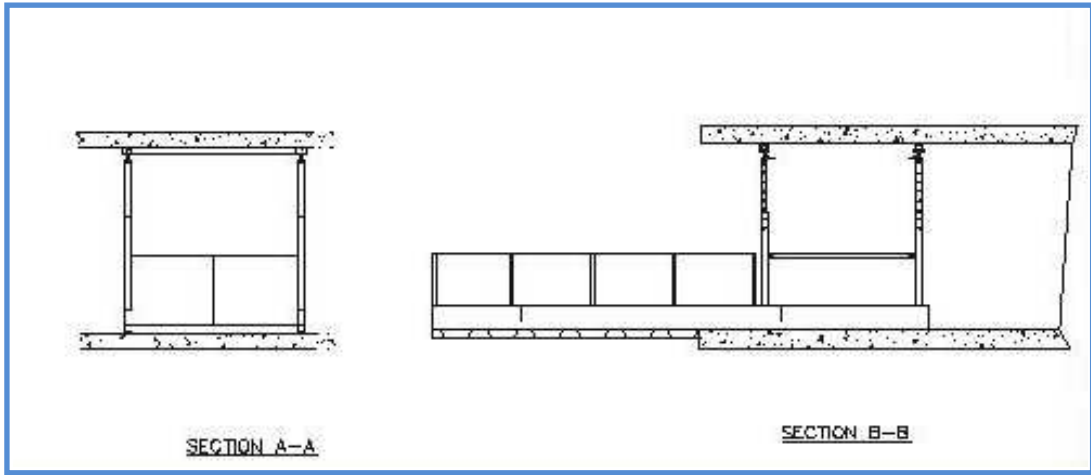

Available Platform Sizes	External Width (m)	Internal Width (m)	Cantilevered Floor Length (m)	Maximum SWL (Tonnes)
XU 28	2.8	2.5	4	5
XU 29	2.9	2.5	4	5
XU 32	3.2	2.8	4	5
XU 35	3.5	3.2	4	5
XU 45	4.5	4.2	4	5